





Multiple type Home Videophone



[Multi-entry Type Configuration]

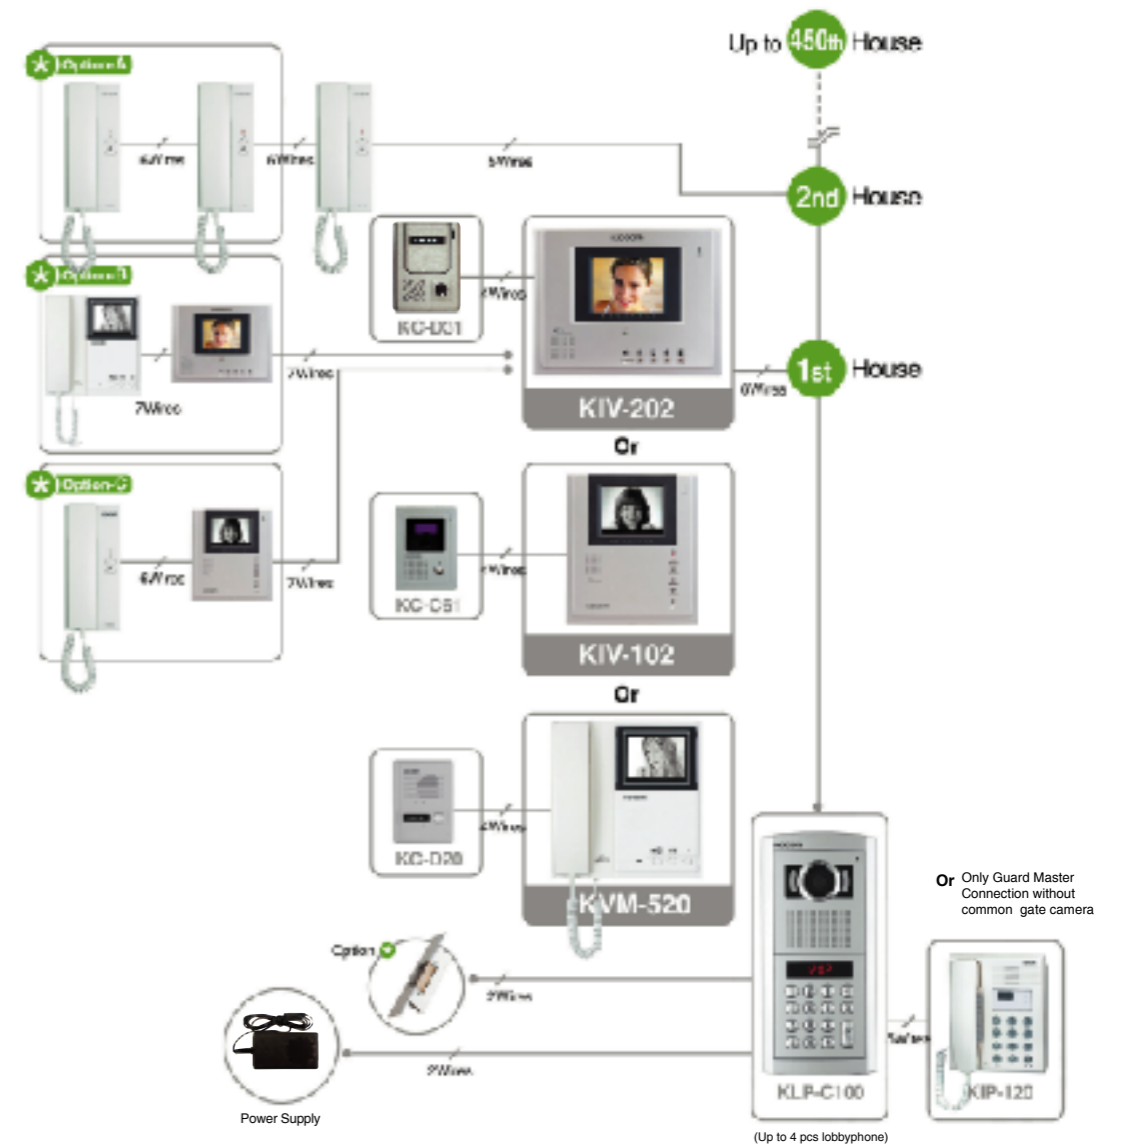

Diagram

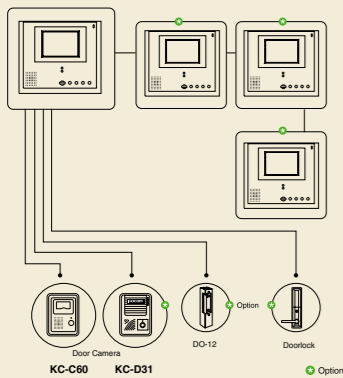

[KIV-202 / D202]

- 4" TFT LCD Color Handsfree VDP
- For single house & multi apartment, condominium & villa system (upto 450 houses) are available
- Up to 5 indoor units (4 monitor & 1 audio handset, KIP-603) and 2 front door cameras connection
- Internal call & conversation function between extended indoor units in a house
- Audio + video conversation with visitor
- Door open (front door & common gate) function
- Call & conversation function with guard master (KIP-120)
- Monitoring function from front door camera & common gate camera (KLP-C100)
- Upto 4pcs of common gate cameras connection in a building
- KIV-202 : AC Type, KIV-D202 : DC type

Specifications

Model no.	KIV-202	KIV-D202
Power	SMPS AC100V ~ AC240V	DC17V / AC24V (Dual voltage)
Power consumption	Max. 19W, Stand by 2W	
Assurance temperature	0°C~+50°C	
Communication systems	Two way hands free conversation	
TFT LCD	4" Color TFT LCD	
Wiring	4wires (front door camera), 6wires (common gate camera)	
Max. wiring distance	Ø 0.65 single cable : 50m, 5C-2V coaxial cable : 100m (front door camera)	
Mount type	Surface mount	
Dimension (mm)	237(W) x 199(H) x 39(D)	
Weight (Approx.)	1.5kg	
Camera connection	Front door camera	KC-C60, KC-D31 (metal pinhole), KC-MC20(metal pinhole)
	Common gate camera	KLP-C100, KLP-C104, KLP-C108, KLP-C112

The product may include option or additional functions.

Dimension

